




HIGH PRESSURE HOSES

PIGTAILS

Rigid or flex, copper or stainless steel, single loop or double loop, customized for any length with any CGA fitting

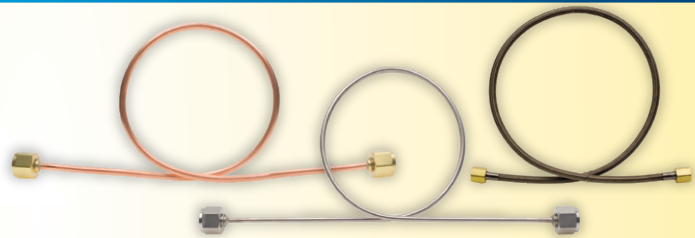

HIGH PRESSURE HOSES

3000 & 3600 PSI Armor Guard or 3000, 3600 & 6000 PSI Spring Guard. Customized with any CGA fittings & any length

HIGH PRESSURE HOSE CHART

Part Number	PTF	PFB	PTF6	PT
CORE/TUBING	PTFE	PTFE Post Sintered	PTFE	Rigid Copper (Brass for Acetylene)
EXTERNAL	SS Single Braid	SS Double Braid	SS Single Braid	--
PSI	3000 PSI	3600 PSI	6000 PSI	3000 PSI
GAS SERVICE	All Gases Except Helium & Hydrogen	All Gases Including Helium & Hydrogen	All Gases Including Helium & Hydrogen	All Gases
OPTIONS	Armor guard, Spring guard, various inlet & outlet configurations	Armor guard, Spring guard, various inlet & outlet configurations	Spring guard, various inlet & outlet configurations	Various inlet & outlet configurations, straight, single, or double loop
APPLICATIONS	General purpose usage up to 3000 PSI	Reduced effusion for lighter-than-air-gases. Increased working pressure & durability	High-Pressure (>3000 PSI) CGA Connections	Any high pressure application where effusion is not permitted

